

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



True

PATENT APPLICATION


IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Halliday et al.)
)
Appln. No.: 10/763,761)
)
Filed: January 23, 2004)
)
Title: Cartridge and Method for)
 the Preparation of)
 Beverages)
)
TC/A.U.: 3727)
)
Examiner: Unassigned)
)
Docket No.: 67642)
)
Customer No.: 22242)
)
Confirmation No.: 7547

CERTIFICATE OF MAILING

I hereby certify that this paper is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, P. O. Box 1450, Alexandria, VA 22313-1450, on this date.

June 4, 2004
Date



Joseph E. Shipley
Registration No. 31,137
Attorney for Applicant(s)

TRANSMITTAL OF PRIORITY DOCUMENT


Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

A claim for priority based on United Kingdom Application No. 0301708.4 is filed herewith for the above-identified United States patent application. Enclosed, in compliance with 37 C.F.R. §1.55, is a Certified Copy of the UK Priority Document, filed January 24, 2003.

Respectfully submitted,

Date: June 4, 2004



Joseph E. Shipley
Registration No. 31,137

FITCH, EVEN, TABIN & FLANNERY
Suite 1600
120 South LaSalle Street
Chicago, Illinois 60603-3406
Telephone: (312) 577-7000
Facsimile: (312) 577-7007



THIS PAGE BLANK (USPTO)



US copy



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed



Dated 11 February 2004

THIS PAGE BLANK (USPTO)




17404 P107135-1 000000
7077700 1 01-01 708.6 100

Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference	SJA/NDT/P62310/000
2. Patent application number (if you know it)	0301708.4
3. Full name of the or of each applicant	Kraft Foods R & D, Inc.
4. Title of the invention	Cartridge and Method for the Preparation of Beverages
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	Kraft Foods UK Ltd. derive the right by virtue of contracts of employment of the inventors. Kraft Foods R & D, Inc. derive the right by virtue of a subsequent assignment dated 16 January 2004.
6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c))	
7.	<p>I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.</p> <p>Signature  Date 23 January 2004</p>
8. Name and daytime telephone number of person to contact in the United Kingdom	Neil Thomson 020-7430-7500

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

HALLIDAY; Andrew
Ruscote Avenue
Banbury
Oxfordshire
OX16 7QU

Patents ADP number (if you know it): 8796005001


BALLARD; Colin
Ruscote Avenue
Banbury
Oxfordshire
OX16 7QU

Patents ADP number (if you know it): 8796039001

Reminder

Have you signed the form?

Patents ADP number (if you know it):

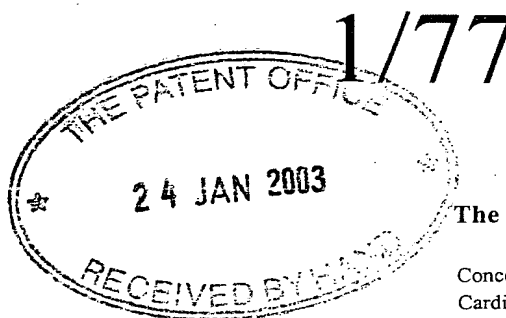

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Concept House
Cardiff Road
Newport
South Wales NP10 8QQ

1.	Your reference	SJA/NT/62310/000		
2.	Patent application number (The Patent Office will fill in this part)	0301708.4	24 JAN 2003	
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	Kraft Foods R & D, INC. Zweigniederlassung München Unterbiberger Str. 15 D-81737 MUNICH GERMANY		
	Patents ADP number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	Germany		
4.	Title of the invention	Cartridge and Method for the Preparation of Beverages		
5.	Name of your agent (if you have one)	BOULT WADE TENNANT		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	VERULAM GARDENS 70 GRAY'S INN ROAD LONDON WC1X 8BT		
	Patents ADP number (if you know it)	42001 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

084259 93 003

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 33

Claim(s) 2

Abstract

Drawing(s) 15

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 1

Any other documents
(Please specify)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date

24 January 2003

12.

Name and daytime telephone number of person to contact in the United Kingdom

Neil Thomson
020 7430 7500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

CARTRIDGE AND METHOD FOR THE PREPARATION OF BEVERAGES

The present invention relates to a cartridge system for the preparation of beverages and, in particular, to sealed
5 cartridges which are formed from substantially air- and water-impermeable materials and which contain one or more ingredients for the preparation of beverages. There is also disclosed a method of manufacturing a cartridge system.

It has previously been proposed to seal beverage
10 preparation ingredients in individual air-impermeable packages. For example, cartridges or capsules containing compacted ground coffee are known for use in certain coffee preparation machines which are generally termed "espresso" machines. In the production of coffee using these
15 preparation machines the coffee cartridge is placed in a brewing chamber and hot water is passed through the cartridge at relatively high pressures, thereby extracting the aromatic coffee constituents from the ground coffee to produce the coffee beverage. Typically, such machines
20 operate at a pressure of greater than 6×10^5 Pa. The preparation machines of the type described have to date been relatively expensive since components of the machine, such as the water pumps and seals, must be able to withstand the high pressures.

25 In WO01/58786 there is described a cartridge for the preparation of beverages which operates at a pressure generally in the range 0.7 to 2.0×10^5 Pa. However, the cartridge is designed for use in a beverage preparation machine for the commercial or industrial market and is
30 relatively expensive and not able to dispense many beverage types. Hence, there remains a requirement for a system for

the preparation of beverages wherein the cartridges and beverage preparation machine of the system are suitable, in particular, for the domestic market in terms of cost, performance and reliability. There is also a need for a
5 beverage preparation machine for such a system which is simple to operate and reliable in operation and can produce a wide range of beverage types.

Accordingly, the present invention provides a cartridge containing one or more beverage ingredients and being formed
10 from substantially air- and water-impermeable materials, said cartridge comprising a storage chamber containing the one or more beverage ingredients, wherein the aspect ratio of the vertical height of the storage chamber to the diameter of the storage chamber is between 0.1 and 0.35.

15 Preferably, the aspect ratio of the vertical height of the storage chamber to the diameter of the storage chamber is 0.20 to 0.25.

Preferably, the cartridge is disc-shaped.

The present invention also provides a method of
20 dispensing a beverage from a cartridge containing one or more beverage ingredients in a storage chamber, comprising the steps of passing an aqueous medium through the cartridge to form a beverage from said one or more beverage ingredients, and dispensing the beverage into a receptacle,
25 wherein the cartridge has an aspect ratio of the vertical height of the storage chamber to the diameter of the storage chamber of between 0.1 and 0.35 and the aqueous medium is passed through the cartridge at a pressure of 0.1 to 2.0 bar.

Preferably, the aspect ratio of the vertical height of the storage chamber to the radius of the storage chamber is 0.20 to 0.25.

The cartridge of the present invention contains one or
5 more beverage ingredients suitable for the formation of a beverage product. The beverage product may be, for example, one of coffee, tea, chocolate or a dairy-based beverage including milk. The beverage ingredients may be powdered, ground, leaf-based or liquid. The beverage ingredients may
10 be insoluble or soluble. Examples include roast and ground coffee, leaf tea, powdered cocoa solids and soup, liquid milk-based beverages and concentrated fruit juices.

In the following description the terms "upper" and "lower" and equivalents will be used to describe the
15 relational positioning of features of the invention. The terms "upper" and "lower" and equivalents should be understood to refer to the cartridge (or other components) in its normal orientation for insertion into a beverage preparation machine and subsequent dispensing as shown, for
20 example, in Figure 4. In particular, "upper" and "lower" refer, respectively, to relative positions nearer or further from a top surface 11 of the cartridge. In addition, the terms "inner" and "outer" and equivalents will be used to describe the relational positioning of features of the
25 invention. The terms "inner" and "outer" and equivalents should be understood to refer to relative positions in the cartridge (or other components) being, respectively, nearer or further from a centre or major axis X of the cartridge 1 (or other component).

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is cross-sectional drawing of an outer member
5 of first and second embodiments of cartridge according to the present invention;

Figure 2 is a cross-sectional drawing of a detail of the outer member of Figure 1 showing an inwardly directed cylindrical extension;

10 Figure 3 is a cross-sectional drawing of a detail of the outer member of Figure 1 showing a slot;

Figure 4 is a perspective view from above of the outer member of Figure 1;

15 Figure 5 is a perspective view from above of the outer member of Figure 1 in an inverted orientation;

Figure 6 is a plan view from above of the outer member of Figure 1;

Figure 7 is a cross-sectional drawing of an inner member of the first embodiment of cartridge;

20 Figure 8 is a perspective view from above of the inner member of Figure 7;

Figure 9 is a perspective view from above of the inner member of Figure 7 in an inverted orientation;

25 Figure 10 is a plan view from above of the inner member of Figure 7;

Figure 11 is a cross-sectional drawing of the first embodiment of cartridge in an assembled condition;

Figure 12 is a cross-sectional drawing of an inner member of the second embodiment of cartridge;

30 Figure 13 is a cross-sectional drawing of a detail of the inner member of Figure 12 showing an aperture;

Figure 14 is a perspective view from above of the inner member of Figure 12;

Figure 15 is a perspective view from above of the inner member of Figure 12 in an inverted orientation;

5 Figure 16 is another cross-sectional drawing of the inner member of Figure 12;

Figure 17 is a cross-sectional drawing of another detail of the inner member of Figure 12 showing an air inlet;

10 Figure 18 is a cross-sectional drawing of the second embodiment of cartridge in an assembled condition;

Figure 19 is cross-sectional drawing of an outer member of third and fourth embodiments of cartridge according to the present invention;

15 Figure 20 is a cross-sectional drawing of a detail of the outer member of Figure 19 showing an inwardly directed cylindrical extension;

Figure 21 is a plan view from above of the outer member of Figure 19;

20 Figure 22 is a perspective view from above of the outer member of Figure 19;

Figure 23 is a perspective view from above of the outer member of Figure 19 in an inverted orientation;

25 Figure 24 is a cross-sectional drawing of an inner member of the third embodiment of cartridge;

Figure 25 is a plan view from above of the inner member of Figure 24;

30 Figure 26 is a cross-sectional drawing of a detail of the inner member of Figure 24 showing an in-turned upper rim;

Figure 27 is a perspective view from above of the inner member of Figure 24;

Figure 28 is a perspective view from above of the inner member of Figure 24 in an inverted orientation;

5 Figure 29 is a cross-sectional drawing of the third embodiment of cartridge in an assembled condition;

Figure 30 is a cross-sectional drawing of an inner member of the fourth embodiment of cartridge;

10 Figure 31 is a plan view from above of the inner member of Figure 30;

Figure 32 is a perspective view from above of the inner member of Figure 30;

Figure 33 is a perspective view from above of the inner member of Figure 30 in an inverted orientation;

15 Figure 34 is a cross-sectional drawing of the fourth embodiment of cartridge in an assembled condition;

Figure 35a is a graph of concentration vs. operating cycle time;

20 Figure 35b is a graph of foamability vs. operating cycle time;

Figure 35c is a graph of temperature vs. operating cycle time; and

Figure 36 is a graph of normalised pressure vs. aspect ratio.

25

As shown in Figure 11, the cartridge 1 of the present invention generally comprises an outer member 2, an inner member 3 and a laminate 5. The outer member 2, inner member 3 and laminate 5 are assembled to form the cartridge 1 which
30 has an interior 120 for containing one or more beverage ingredients, an inlet 121, an outlet 122 and a beverage flow

path linking the inlet 121 to the outlet 122 and which passes through the interior 120. The inlet 121 and outlet 122 are initially sealed by the laminate 5 and are opened in use by piercing or cutting of the laminate 5. The beverage
5 flow path is defined by spatial inter-relationships between the outer member 2, inner member 3 and laminate 5 as discussed below. Other components may optionally be included in the cartridge 1, such as a filter 4, as will be described further below.

10 A first version of cartridge 1 is shown in Figures 1 to 11. The first version of the cartridge 1 is particularly designed for use in dispensing filtered products such as roast and ground coffee or leaf tea. However, this version of the cartridge 1 and the other versions described below
15 may be used with other products such as chocolate, coffee, tea, sweeteners, cordials, flavourings, alcoholic beverages, flavoured milk, fruit juices, squashes, sauces and desserts.

As can be seen from Figure 5, the overall shape of the cartridge 1 is generally circular or disc-shaped with the
20 diameter of the cartridge 1 being significantly greater than its height. A major axis X passes through the centre of the outer member as shown in Figure 1. Typically the overall diameter of the outer member 2 is 74.5 mm \pm 6mm and the overall height is 16 mm \pm 3mm. Typically the volume of the
25 cartridge 1 when assembled is 30.2 ml \pm 20%. According to the present invention, the aspect ratio of the cartridge is between 0.1 and 0.35, preferably between 0.20 and 0.25. The aspect ratio is defined as the ratio of the internal
vertical height of the interior 120, which contains the one
30 or more beverage ingredients, against the internal diameter of the interior 120. As shown in Figure 36, the pressure

required to dispense beverages from the cartridges of the present invention varies according to the aspect ratio of the cartridge. It has been found that an aspect ratio of between 0.1 and 0.35 is advantageous in balancing the desire
5 to minimise the pressure required to dispense the beverage and the need to maximise the extraction and foaming of the beverage during dispense.

The outer member 2 generally comprises a bowl-shaped shell 10 having a curved annular wall 13, a closed top 11
10 and an open bottom 12. The diameter of the outer member 2 is smaller at the top 11 compared to the diameter at the bottom 12, resulting from a flaring of the annular wall 13 as one traverses from the closed top 11 to the open bottom 12. The annular wall 13 and closed bottom 11 together define a
15 receptacle having an interior 34.

A hollow inwardly directed cylindrical extension 18 is provided in the closed top 11 centred on the major axis X. As more clearly shown in Figure 2, the cylindrical extension 18 comprises a stepped profile having first, second and
20 third portions 19, 20 and 21. The first portion 19 is right circular cylindrical. The second portion 20 is frusto-conical in shape and is inwardly tapered. The third portion 21 is another right circular cylinder and is closed off by a lower face 31. The diameter of the first, second and third
25 portion 19, 20 and 21 incrementally decreases such that the diameter of the cylindrical extension 18 decreases as one traverses from the top 11 to the closed lower face 31 of the cylindrical extension 18. A generally horizontal shoulder 32 is formed on the cylindrical extension 18 at the junction
30 between the second and third portions 20 and 21.

An outwardly extending shoulder 33 is formed in the outer member 2 towards the bottom 12. The outwardly extending shoulder 33 forms a secondary wall 15 co-axial with the annular wall 13 so as to define an annular track forming a manifold 16 between the secondary wall 15 and the annular wall 13. The manifold 16 passes around the circumference of the outer member 2. A series of slots 17 are provided in the annular wall 13 level with the manifold 16 to provide gas and liquid communication between the manifold 16 and the interior 34 of the outer member 2. As shown in Figure 3, the slots 17 comprise vertical slits in the annular wall 13. Between 20 and 40 slots are provided. In the embodiment shown thirty-seven slots 17 are provided generally equi-spaced around the circumference of the manifold 16. The slots 17 are preferably between 1.4 and 1.8 mm in length. Typically the length of each slot is 1.6 mm representing 10% of the overall height of the outer member 2. The width of each slot is between 0.25 and 0.35 mm. Typically, the width of each slot is 0.3 mm. The width of the slots 17 is sufficiently narrow to prevent the beverage ingredients passing therethrough into the manifold 16 either during storage or in use.

An inlet chamber 26 is formed in the outer member 2 at the periphery of the outer member 2. A cylindrical wall 27 is provided, as most clearly shown in Figure 5, which defines the inlet chamber 26 within, and partitions the inlet chamber 26 from, the interior 34 of the outer member 2. The cylindrical wall 27 has a closed upper face 28 which is formed on a plane perpendicular to the major axis X and an open lower end 29 co-planar with the bottom 12 of the outer member 2. The inlet chamber 26 communicates with the

manifold 16 via two slots 30 as shown in Figure 1.

Alternatively, between one and four slots may be used to communicate between the manifold 16 and the inlet chamber 26.

5 A lower end of the outwardly extending shoulder 33 is provided with an outwardly extending flange 35 which extends perpendicularly to the major axis X. Typically the flange 35 has a width of between 2 and 4 mm. A portion of the flange 35 is enlarged to form a handle 24 by which the outer member
10 2 may be held. The handle 24 is provided with an upturned rim 25 to improve grip.

The outer member 2 is formed as a single integral piece from high density polyethylene, polypropylene, polystyrene, polyester, or a laminate of two or more of these materials.
15 A suitable polypropylene is the range of polymers available from DSM UK Limited (Redditch, United Kingdom). The outer member may be opaque, transparent or translucent. The manufacturing process may be injection moulding.

The inner member 3 as shown in Figures 7 to 10,
20 comprises an annular frame 41 and a downwardly extending cylindrical funnel 40. A major axis X passes through the centre of the inner member 3 as shown in Figure 7.

As best shown in Figure 8, the annular frame 41 comprises an outer rim 51 and an inner hub 52 joined by ten
25 equi-spaced radial spokes 53. The inner hub 52 is integral with and extends from the cylindrical funnel 40. Filtration apertures 55 are formed in the annular frame 41 between the radial spokes 53. A filter 4 is disposed on the annular frame 41 so as to cover the filtration apertures 55. The
30 filter is preferably made from a material with a high wet strength, for example a non-woven fibre material of

polyester. Other materials which may be used include a water-impermeable cellulosic material, such as a cellulosic material comprising woven paper fibres. The woven paper fibres may be admixed with fibres of polypropylene,
5 polyvinyl chloride and/or polyethylene. The incorporation of these plastic materials into the cellulosic material renders the cellulosic material heat-sealable. The filter 4 may also be treated or coated with a material which is activated by heat and/or pressure so that it can be sealed
10 to the annular frame 41 in this way.

As shown in the cross-sectional profile of Figure 7, the inner hub 52 is located at a lower position than the outer rim 51, resulting in the annular frame 41 having a sloping lower profile.

15 The upper surface of each spoke 53 is provided with an upstanding web 54 which divides a void space above the annular frame 41 into a plurality of passages 57. Each passage 57 is bounded on either side by a web 54 and on a lower face by the filter 4. The passages 57 extend from the
20 outer rim 51 downwardly towards, and open into, the cylindrical funnel 40 at openings 56 defined by the inner extremities of the webs 54.

The cylindrical funnel 40 comprises an outer tube 42 surrounding an inner discharge spout 43. The outer tube 42
25 forms the exterior of the cylindrical funnel 40. The discharge spout 43 is joined to the outer tube 42 at an upper end of the discharge spout 43 by means of an annular flange 47. The discharge spout 43 comprises an inlet 45 at an upper end which communicates with the openings 56 of the
30 passages 57 and an outlet 44 at a lower end through which the prepared beverage is discharged into a cup or other

receptacle. The discharge spout 43 comprises a frusto-conical portion 48 at an upper end and a cylindrical portion 58 at a lower end. The cylindrical portion 58 may have a slight taper such that it narrows towards the outlet 44.

5 The frusto-conical portion 48 helps to channel beverage from the passages 57 down towards the outlet 44 without inducing turbulence to the beverage. An upper surface of the frusto-conical portion 48 is provided with four support webs 49 equi-spaced around the circumference of the cylindrical
10 funnel 40. The support webs 49 define channels 50 therebetween. The upper edges of the support webs 49 are level with one another and perpendicular to the major axis X.

The inner member 3 may be formed as a single integral
15 piece from polypropylene or a similar material as described above and by injection moulding in the same manner as the outer member 2.

Alternatively, the inner member 3 and/or the outer member 2 may be made from a biodegradable polymer. Examples
20 of suitable materials include degradable polyethylene (for example, SPITEK supplied by Symphony Environmental, Borehamwood, United Kingdom), biodegradable polyester amide (for example, BAK 1095 supplied by Symphony Environmental), poly lactic acids (PLA supplied by Cargil, Minnesota, USA),
25 starch-based polymers, cellulose derivatives and polypeptides.

The laminate 5 is formed from two layers, a first layer of aluminium and a second layer of cast polypropylene. The aluminium layer is between 0.02 and 0.07 mm in thickness.
30 The cast polypropylene layer is between 0.025 and 0.065 mm in thickness. In one embodiment the aluminium layer is 0.06

mm and the polypropylene layer is 0.025 mm thick. This laminate is particularly advantageous as it has a high resistance to curling during assembly. As a result the laminate 5 may be pre-cut to the correct size and shape and subsequently transferred to the assembly station on the production line without undergoing distortion. Consequently, the laminate 5 is particularly well suited to welding. Other laminate materials may be used including PET/Aluminium/PP, PE/EVOH/PP, PET/metallised/PP and Aluminium/PP laminates.

10 Roll laminate stock may be used instead of die cut stock.

The cartridge 1 may be closed by a rigid or semi-rigid lid instead of a flexible laminate.

Assembly of the cartridge 1 involves the following steps:

- 15 a) the inner member 3 is inserted into the outer member 2;
- b) the filter 4 is cut to shape and placed onto the inner member 3 so to be received over the cylindrical funnel 40 and come to rest against the annular frame 41;
- 20 c) the inner member 3, outer member 2 and filter 4 are joined by ultrasonic welding;
- d) the cartridge 1 is filled with one or more beverage ingredients;
- 25 e) the laminate 5 is affixed to the outer member 2.

These steps will be discussed in greater detail below.

The outer member 2 is orientated with the open bottom 12 directed upwards. The inner member 3 is then inserted into the outer member 2 with the outer rim 51 being received as a loose fit in an axial extension 14 at top 11 of the cartridge 1. The cylindrical extension 18 of the outer

30

member 2 is at the same time received in the upper portion of the cylindrical funnel 40 of the inner member 3. The third portion 21 of the cylindrical extension 18 is seated inside the cylindrical funnel 40 with the closed lower face 31 of the cylindrical extension 18 bearing against the support webs 49 of the inner member 3. The filter 4 is then placed over the inner member 3 such that the filter material contacts the annular rim 51. An ultrasonic welding process is then used to join the filter 4 to the inner member 3 and at the same time, and in the same process step, the inner member 3 to the outer member 2. The inner member 3 and filter 4 are welded around the outer rim 51. The inner member 3 and outer member 2 are joined by means of weld lines around the outer rim 51 and also the upper edges of the webs 54.

As shown most clearly in Figure 11, the outer member 2 and inner member 3 when joined together define a void space 130 in the interior 120 below the annular flange 41 and exterior the cylindrical funnel 40 which forms a filtration chamber. The filtration chamber 130 and passages 57 above the annular frame 41 are separated by the filter paper 4.

The filtration chamber 130 contains the one or more beverage ingredients 200. The one or more beverage ingredients are packed into the filtration chamber 130. For a filtered style beverage the ingredient is typically roast and ground coffee or leaf tea. The density of packing of the beverage ingredients in the filtration chamber 130 can be varied as desired. Typically, for a filtered coffee product the filtration chamber contains between 5.0 and 10.2 grams of roast and ground coffee in a filtration bed of thickness of typically 5 to 14 mm. Optionally, the interior 120 may

contain one or more bodies, such as spheres, which are freely movable within the interior 120 to aid mixing by inducing turbulence and breaking down deposits of beverage ingredients during discharge of the beverage.

5 The laminate 5 is then affixed to the outer member 2 by forming a weld 126 around the periphery of the laminate 5 to join the laminate 5 to the lower surface of the outwardly extending flange 35. The weld 126 is extended to seal the laminate 5 against the lower edge of the cylindrical wall 27
10 of the inlet chamber 26. Further, a weld 125 is formed between the laminate 5 and the lower edge of the outer tube 42 of the cylindrical funnel 40. The laminate 5 forms the lower wall of the filtration chamber 130 and also seals the inlet chamber 26 and cylindrical funnel 40. However, a small
15 gap 123 exists prior to dispensation between the laminate 5 and the lower edge of the discharge spout 43. A variety of welding methods may be used, such as heat and ultrasonic welding, depending on the material characteristics of the laminate 5.

20 Advantageously, the inner member 3 spans between the outer member 2 and the laminate 5. The inner member 3 is formed from a material of relative rigidity, such as polypropylene. As such, the inner member 3 forms a load-bearing member that acts to keep the laminate 5 and outer
25 member 2 spaced apart when the cartridge 1 is compressed. It is preferred that the cartridge 1 is subjected to a compressive load of between 130 and 280N in use. The compressive force acts to prevent the cartridge failing under internal pressurisation and also serves to squeeze the
30 inner member 3 and outer member 2 together. This ensures that the internal dimensions of passageways and apertures in

the cartridge 1 are fixed and unable to change during pressurisation of the cartridge 1.

To use the cartridge 1 it is first inserted into a beverage preparation machine and the inlet 121 and outlet 5 122 are opened by piercing members of the beverage preparation machine which perforate and fold back the laminate 5. An aqueous medium, typically water, under pressure enters the cartridge 1 through the inlet 121 into the inlet chamber 26 at a pressure of between 0.1-2.0 bar. 10 From there the water is directed to flow through the slots 30 and round the manifold 16 and into the filtration chamber 130 of the cartridge 1 through the plurality of slots 17. The water is forced radially inwardly through the filtration chamber 130 and mixes with the beverage ingredients 200 15 contained therein. The water is at the same time forced upwardly through the beverage ingredients. The beverage formed by passage of the water through the beverage ingredients passes through the filter 4 and filtration apertures 55 into the passages 57 lying above the annular 20 frame 41. The sealing of the filter 4 onto the spokes 53 and the welding of the rim 51 with the outer member 2 ensures that there are no short-circuits and all the beverage has to pass through the filter 4.

The beverage then flows downwardly along the radial 25 passages 57 formed between the webs 54 and through the openings 56 and into the cylindrical funnel 40. The beverage passes along the channels 50 between the support webs 47 and down the discharge spout 43 to the outlet 44 where the beverage is discharged into a receptacle such as a cup.

30 Preferably, the beverage preparation machine comprises an air purge facility, wherein compressed air is forced

through the cartridge 1 at the end of the operating cycle to flush out the remaining beverage into the receptacle.

A second version of cartridge 1 is shown in Figures 12 to 18. The second version of the cartridge 1 is particularly
5 designed for use in dispensing espresso-style products such as roast and ground coffee where it is desirable to produce a beverage having a froth of tiny bubbles known as a crema. Many of the features of the second version of the cartridge 1 are the same as in the first version and like numerals
10 have been used to reference like features. In the following description the differences between the first and second versions will be discussed. Common features which function in the same manner will not be discussed in detail.

The outer member 2 is of the same construction as in
15 the first version of cartridge 1 and as shown in Figures 1 to 6.

The annular frame 41 of the inner member 3 is the same as in the first version. Also, a filter 4 is disposed on the annular frame 41 so as to cover the filtration apertures
20 55. The outer tube 42 of the cylindrical funnel 40 is also as before. However, there are a number of differences in the construction of the inner member 2 of the second version compared to the first version. As shown in Figure 16, the discharge spout 43 is provided with a partition 65 which
25 extends part way up the discharge spout 43 from the outlet 44. The partition 65 helps to prevent the beverage spraying and/or splashing as it exits the discharge spout 43. The profile of the discharge spout 43 is also different and comprises a stepped profile with a distinct dog-leg 66 near
30 an upper end of the tube 43.

A rim 67 is provided upstanding from the annular flange 47 joining the outer tube 42 to the discharge spout 43. The rim 67 surrounds the inlet 45 to the discharge spout 43 and defines an annular channel 69 between the rim 67 and the upper portion of the outer tube 42. The rim 67 is provided with an inwardly directed shoulder 68. At one point around the circumference of the rim 67 an aperture 70 is provided in the form of a slot which extends from an upper edge of rim 67 to a point marginally below the level of the shoulder 68 as most clearly shown in Figures 12 and 13. The slot has a width of 0.64 mm.

An air inlet 71 is provided in annular flange 47 circumferentially aligned with the aperture 70 as shown in Figures 16 and 17. The air inlet 71 comprises an aperture passing through the flange 47 so as to provide communication between a point above the flange 47 and the void space below the flange 47 between the outer tube 42 and discharge spout 43. Preferably, and as shown, the air inlet 71 comprises an upper frusto-conical portion 73 and a lower cylindrical portion 72. The air inlet 71 is typically formed by a mould tool such as a pin. The tapered profile of the air inlet 71 allows the mould tool to be more easily removed from the moulded component. The wall of the outer tube 42 in the vicinity of the air inlet 71 is shaped to form a chute 75 leading from the air inlet 71 to the inlet 45 of the discharge spout 43. As shown in Figure 17, a canted shoulder 74 is formed between the air inlet 71 and the chute 75 to ensure that the jet of beverage issuing from the slot 70 does not immediately foul on the upper surface of the flange 47 in the immediate vicinity of the air inlet 71.

The assembly procedure for the second version of cartridge 1 is similar to the assembly of the first version. However, there are certain differences. As shown in Figure 18, the third portion 21 of the cylindrical extension 18 is seated inside the support rim 67 rather than against support webs. The shoulder 32 of the cylindrical extension 18 between the second portion 20 and third portion 21 bears against the upper edge of the support rim 67 of the inner member 3. An interface zone 124 is thus formed between the inner member 3 and the outer member 2 comprising a face seal between the cylindrical extension 18 and the support rim 67 which extends around nearly the whole circumference of the cartridge 1. The seal between the cylindrical extension 18 and the support rim 67 is not fluid-tight though since the slot 70 in the support rim 67 extends through the support rim 67 and downwardly to a point marginally below the shoulder 68. Consequently the interface fit between the cylindrical extension 18 and the support rim 67 transforms the slot 70 into an aperture 128, as most clearly shown in Figure 18, providing gas and liquid communication between the annular channel 69 and the discharge spout 43. The aperture is typically 0.64 mm wide by 0.69 mm long.

Operation of the second version of cartridge 1 to dispense a beverage is similar to the operation of the first version but with certain differences. Beverage in the radial passages 57 flows downwardly along the passages 57 formed between the webs 54 and through the openings 56 and into the annular channel 69 of the cylindrical funnel 40. From the annular channel 69 the beverage is forced under pressure through the aperture 128 by the back pressure of beverage collecting in the filtration chamber 130 and

passages 57. The beverage is thus forced through aperture 128 as a jet and into an expansion chamber formed by the upper end of the discharge spout 43. As shown in Figure 18, the jet of beverage passes directly over the air inlet 71.

5 As the beverage enters the discharge spout 43 the pressure of the beverage jet drops. As a result air is entrained into the beverage stream in the form of a multitude of small air bubbles as the air is drawn up through the air inlet 71.

The jet of beverage issuing from the aperture 128 is

10 funnelled downwards to the outlet 44 where the beverage is discharged into a receptacle such as a cup where the air bubbles form the desired crema. Thus, the aperture 128 and the air inlet 71 together form an eductor which acts to entrain air into the beverage. Flow of beverage into the
15 eductor should be kept as smooth as possible to reduce pressure losses. Advantageously, the walls of the eductor should be made concave to reduce losses due to 'wall effect' friction. The dimensional tolerance of the aperture 128 is small. Preferably the aperture size is fixed plus or minus
20 0.02 mm^2 . Hairs, fibrils or other surface irregularities can be provided within or at the exit of the eductor to increase the effective cross-sectional area which has been found to increase the degree of air entrainment.

A third version of cartridge 1 is shown in Figures 19
25 to 29. The third version of the cartridge 1 is particularly designed for use in dispensing soluble products which may be in powdered, liquid, syrup, gel or similar form. The soluble product is dissolved by or forms a suspension in, an aqueous medium such as water when the aqueous medium is passed, in
30 use, through the cartridge 1. Examples of beverages include chocolate, coffee, milk, tea, soup or other rehydratable or

aqueous-soluble products. Many of the features of the third version of the cartridge 1 are the same as in the previous versions and like numerals have been used to reference like features. In the following description the differences

5 between the third and previous versions will be discussed. Common features which function in the same manner will not be discussed in detail.

Compared to the outer member 2 of the previous versions, the hollow inwardly directed cylindrical extension
10 18 of the outer member 2 of the third version has a larger overall diameter as shown in Figure 20. In particular the diameter of the first portion 19 is typically between 16 and 18 mm compared to 13.2 mm for the outer member 2 of the previous versions. In addition, the first portion 19 is
15 provided with a convex outer surface 19a, or bulge, as most clearly shown in Figure 20, the function of which will be described below. The diameter of the third portions 21 of the cartridges 1 are however the same resulting in the area of the shoulder 32 being greater in this, the third version
20 of the cartridge 1. Typically the volume of the cartridge 1 when assembled is 32.5 ml $\pm 20\%$.

The number and positioning of the slots in the lower end of the annular wall 13 is also different. Between 3 and 5 slots are provided. In the embodiment as shown in Figure
25 23, four slots 36 are provided equi-spaced around the circumference of the manifold 16. The slots 36 are slightly wider than in the previous versions of the cartridge 1 being between 0.35 and 0.45 mm, preferably 0.4 mm wide.

In other respects the outer members 2 of the cartridges
30 1 are the same.

The construction of the cylindrical funnel 40 of the inner member 3 is the same as in the first version of cartridge 1 with an outer tube 42, discharge spout 45, annular flange 47 and support webs 49 being provided. The
5 only difference is that the discharge spout 45 is shaped with an upper frusto-conical section 92 and a lower cylindrical section 93.

In contrast to the previous versions and as shown in Figures 24 to 28, the annular frame 41 is replaced by a
10 skirt portion 80 which surrounds the cylindrical funnel 40 and is joined thereto by means of eight radial struts 87 which adjoin the cylindrical funnel 40 at or near the annular flange 47. A cylindrical extension 81 of the skirt portion 80 extends upwardly from the struts 87 to define a
15 chamber 90 with an open upper face. An upper rim 91 of the cylindrical extension 81 has an in-turned profile as shown in Figure 26. An annular wall 82 of the skirt portion 80 extends downwardly from the struts 87 to define an annular channel 86 between the skirt portion 80 and the outer tube
20 42.

The annular wall 82 comprises at a lower end an exterior flange 83 which lies perpendicular to the major axis X. A rim 84 depends downwardly from a lower surface of the flange 83 and contains five apertures 85 which are
25 circumferentially equi-spaced around the rim 84. Thus, the rim 84 is provided with a castellated lower profile.

Apertures 89 are provided between the struts 87 allowing communication between the chamber 90 and the annular channel 86.

30 The assembly procedure for the third version of cartridge 1 is similar to the assembly of the first version

but with certain differences. The outer member 2 and inner member 3 are push-fitted together as shown in Figure 29 and retained by means of a snap-fit arrangement rather than welded together. On joining the two members the inwardly
5 directed cylindrical extension 18 is received inside the upper cylindrical extension 81 of the skirt portion 80. The inner member 3 is retained in the outer member 2 by frictional interengagement of the convex outer surface 19a of the first portion 19 of the cylindrical extension 18 with
10 the in-turned rim 91 of the upper cylindrical extension 81. With the inner member 3 located in the outer member 2 a mixing chamber 134 is defined located exterior to the skirt portion 80. The mixing chamber 134 contains the beverage ingredients 200 prior to dispensation. It should be noted
15 that the four inlets 36 and the five apertures 85 are staggered circumferentially with respect to one another. The radial location of the two parts relative to each other need not be determined or fixed during assembly since the use of four inlets 36 and five apertures 85 ensures that
20 misalignment occurs between the inlets and apertures whatever the relative rotational positioning of the components.

The one or more beverage ingredients are packed into the mixing chamber 134 of the cartridge. The density of
25 packing of the beverage ingredients in the mixing chamber 134 can be varied as desired.

The laminate 5 is then affixed to the outer member 2 and inner member 3 in the same manner as described above in the previous versions.

30 In use, water enters the mixing chamber 134 through the four slots 36 in the same manner as previous versions of the

cartridge. The water is forced radially inwardly through the mixing chamber and mixes with the beverage ingredients contained therein. The product is dissolved or mixed in the water and forms the beverage in the mixing chamber 134 and
5 is then driven through the apertures 85 into the annular channel 86 by back pressure of beverage and water in the mixing chamber 134. The circumferential staggering of the four inlet slots 36 and the five apertures 85 ensures that jets of water are not able to pass radially directly from
10 the inlet slots 36 to the apertures 85 without first circulating within the mixing chamber 134. In this way the degree and consistency of dissolution or mixing of the product is significantly increased. The beverage is forced upwardly in the annular channel 86, through the apertures 89
15 between the struts 87 and into the chamber 90. The beverage passes from chamber 90 through the inlets 45 between the support webs 49 into the discharge spout 43 and towards the outlet 44 where the beverage is discharged into a receptacle such as a cup. The cartridge finds particular application
20 with beverage ingredients in the form of viscous liquids or gels. In one application a liquid chocolate ingredient is contained in the cartridge 1 with a viscosity of between 1700 and 3900mPa at ambient temperature and between 5000 and 10000mPa at 0°C and a refractive solids of 67 Brix ± 3 . In
25 another application liquid coffee is contained in the cartridge 1 with a viscosity of between 70 and 2000mPa at ambient and between 80 and 5000mPa at 0°C where the coffee has a total solids level of between 40 and 70%. The liquid coffee ingredient may contain between 0.1 and 2.0% by weight
30 sodium bicarbonate, preferably between 0.5 and 1.0% by weight. The sodium bicarbonate acts to maintain the pH level

of the coffee at or below 4.8 enabling a shelf-life for coffee-filled cartridges of up to 12 months.

A fourth version of cartridge 1 is shown in Figures 30 to 34. The fourth version of the cartridge 1 is particularly
5 designed for use in dispensing liquid products such as concentrated liquid milk. Many of the features of the fourth version of the cartridge 1 are the same as in the previous versions and like numerals have been used to reference like features. In the following description the differences
10 between the fourth and previous versions will be discussed. Common features which function in the same manner will not be discussed in detail.

The outer member 2 is the same as in the third version of cartridge 1 and as shown in Figures 19 to 23.

15 The cylindrical funnel 40 of the inner member 3 is similar to that shown in the second version of cartridge 1 but with certain differences. As shown in Figure 30 the discharge spout 43 is shaped with an upper frusto-conical section 106 and a lower cylindrical section 107. Three
20 axial ribs 105 are provided on the inner surface of the discharge spout 43 to direct the dispensed beverage downwards towards the outlet 44 and prevent the discharged beverage from spinning within the spout. Consequently, the ribs 105 act as baffles. As in the second version of
25 cartridge 1, an air inlet 71 is provided through the annular flange 47. However, the chute 75 beneath the air inlet 71 is more elongated than in the second version.

A skirt portion 80 is provided similar to that shown in the third version of the cartridge 1 described above.
30 Between 5 and 12 apertures 85 are provided in the rim 84.

Typically ten apertures are provided rather than the five provided in the third version of cartridge 1.

An annular bowl 100 is provided extending from and integral with the flange 83 of the skirt portion 80. The annular bowl 100 comprises a flared body 101 with an open upper mouth 104 which is directed upwards. Four feed apertures 103 shown in Figures 30 and 31 are located in the body 101 at or near the lower end of the bowl 100 where it joins the skirt portion 80. Preferably, the feed apertures are equi-spaced around the circumference of the bowl 100.

The laminate 5 is of the type described above in the previous embodiments.

The assembly procedure for the fourth version of cartridge 1 is the same as that for the third version.

Operation of the fourth version of cartridge is similar to that of the third version. The water enters the cartridge 1 and the mixing chamber 134 in the same manner as before. There the water mixes with and dilutes the liquid product which is then forced out below the bowl 100 and through the apertures 85 towards the outlet 44 as described above. The proportion of the liquid product initially contained within the annular bowl 100 as shown in Figure 34 is not subject to immediate dilution by the water entering the mixing chamber 134. Rather, the diluted liquid product in the lower part of the mixing chamber 134 will tend to exit through apertures 85 rather than be forced up and into the annular bowl 100 through upper mouth 104. Consequently, the liquid product in the annular bowl 100 will remain relatively concentrated during the initial stages of the operating cycle compared to the product in the lower part of the mixing chamber 134. The liquid product in the annular

bowl 100 drips through the feed apertures 103 under gravity into the stream of product exiting the mixing chamber 134 through the apertures 85 and below the bowl 100. The annular bowl 100 acts to even out the concentration of the diluted liquid product entering the cylindrical funnel 40 by holding back a proportion of the concentrated liquid product and releasing it into the exiting liquid stream flow path steadily throughout the operating cycle as illustrated in Figure 35a where the concentration of the milk measured as a percentage of the total solids present is shown during an operating cycle of approximately 15 seconds. Line a illustrates the concentration profile with the bowl 100 whilst line b illustrates a cartridge without the bowl 100. As can be seen the concentration profile with the cup 100 is more even during the operating cycle and there is no immediate large drop in concentration as occurs without the bowl 100. The initial concentration of the milk is typically 30-35% SS and at the end of the cycle 10% SS. This results in a dilution ratio of around 3 to 1, although dilution ratios of between 1 to 1 and 6 to 1 are possible with the present invention. For other liquid beverage ingredients the concentrations may vary. For example for liquid chocolate the initial concentration is approximately 67% SS and at the end of the cycle 12-15% SS. This results in a dilution ratio (ratio of aqueous medium to beverage ingredient in dispensed beverage) of around 5 to 1, although dilution ratios of between 2 to 1 and 10 to 1 are possible with the present invention. For liquid coffee the initial concentration is between 40-67% and the concentration at the end of dispense 1-2% SS. This results in a dilution ratio of between 20 to 1

and 70 to 1, although dilution ratios of between 10 to 1 and 100 to 1 are possible with the present invention.

From the annular channel 86 the beverage is forced under pressure through the aperture 128 by the back pressure of beverage collecting in the filtration chamber 134 and chamber 90. The beverage is thus forced through aperture 128 as a jet and into an expansion chamber formed by the upper end of the discharge spout 43. As shown in Figure 34, the jet of beverage passes directly over the air inlet 71. As the beverage enters the discharge spout 43 the pressure of the beverage jet drops. As a result air is entrained into the beverage stream in the form of a multitude of small air bubbles as the air is drawn up through the air inlet 71. The jet of beverage issuing from the aperture 128 is funnelled downwards to the outlet 44 where the beverage is discharged into a receptacle such as a cup where the air bubbles form the desired frothy appearance.

Advantageously, the inner member 3, outer member 2, laminate 5 and filter 4 can all be readily sterilised due to the components being separable and not individually comprising tortuous passageways or narrow crevices. Rather, it is only after conjoining the components, after sterilisation, that the necessary passageways are formed. This is particularly important where the beverage ingredient is a dairy-based product such as liquid milk concentrate.

The fourth embodiment of beverage cartridge is particularly advantageous for dispensing a concentrated dairy-based liquid product such as liquid milk. Previously, powdered milk products have been provided in the form of sachets for adding to a pre-prepared beverage. However, for a cappuccino-style beverage it is necessary to foam the

milk. This has been achieved previously by passing steam through a liquid milk product. However this necessitates the provision of a steam supply which increases the cost and complexity of the machine used to dispense the beverage.

- 5 The use of steam also increases the risk of injury during operation of the cartridge. Accordingly the present invention provides for a beverage cartridge having a concentrated dairy-based liquid product therein. It has been found that by concentrating the milk product a greater
- 10 amount of foam can be produced for a particular volume of milk when compared to fresh or UHT milk. This reduces the size required for the milk cartridge. Fresh semi-skimmed milk contains approximately 1.6% fat and 10% total solids. The concentrated liquid milk preparations of the present
- 15 invention contain between 0.1 and 12% fat and 25 to 40% total solids. In a typical example, the preparation contains 4% fat and 30% total solids. The concentrated milk preparations are suitable for foaming using a low pressure preparation machine as will be described below. In
- 20 particular, foaming of the milk is achieved at pressures below 2 bar, preferably approximately 1.5 bar using the cartridge of the fourth embodiment described above.

The foaming of the concentrated milk is particularly advantageous for beverages such as cappuccinos and milk

25 shakes. Preferably the passing of the milk through the aperture 128 and over the air inlet 71 and the optional use of the bowl 100 enables foaming levels of greater than 40%, preferably greater than 70% for milk. For liquid chocolate foaming levels of greater than 70% are possible. For liquid

30 coffee foaming levels of greater than 70% are possible. The foamability level is measured as the ratio of the volume of

the foam produced to the volume of liquid beverage ingredient dispensed. For example, where 138.3ml of beverage is dispensed, of which 58.3ml is foam the foamability is measured as $[58.3/(138.3-58.3)]*100 = 72.9\%$. The foamability of the milk (and other liquid ingredients) is enhanced by the provision of the bowl 100 as can be seen in Figure 35b. The foamability of the milk dispensed with the bowl 100 present (line a) is greater than that of milk dispensed without the bowl present (line b). This is because the foamability of the milk is positively correlated to the concentration of the milk and as shown in Figure 35a the bowl 100 maintains a higher concentration of the milk a larger part of the operating cycle. It is also known that foamability of the milk is positively correlated to temperature of the aqueous medium as shown in Figure 35c. Thus the bowl 100 is advantageous since more of the milk remains in the cartridge until near the end of the operating cycle when the aqueous medium is at its hottest. This again improves foamability.

The cartridge of the fourth embodiment is also advantageous in dispensing liquid coffee products.

It has been found that the embodiments of beverage cartridge of the present invention advantageously provide an improved consistency of the brewed beverage when compared to prior art cartridges. Reference is made to Table 1 below which shows the results of brew yields for twenty samples each of cartridges A and B containing roast and ground coffee. Cartridge A is a beverage cartridge according to the first embodiment of the present invention. Cartridge B is a prior art beverage cartridge as described in the applicant's document WO01/58786. The refractive index of the brewed

beverage is measured in Brix units and converted to a percentage of soluble solids (%SS) using standard tables and formulae. In the examples below:

$$5 \quad \%SS = 0.7774 * (\text{Brix value}) + 0.0569.$$

$$\% \text{ Yield} = (\%SS * \text{Brew Volume (g)}) / (100 * \text{Coffee Weight (g)})$$

10 Table 1

CARTRIDGE A

Sample	Brew Volume (g)	Coffee Weight (g)	Brix	% SS (*)	% Yield
1	105.6	6.5	1.58	1.29	20.88
2	104.24	6.5	1.64	1.33	21.36
3	100.95	6.5	1.67	1.36	21.05
4	102.23	6.5	1.71	1.39	21.80
5	100.49	6.5	1.73	1.40	21.67
6	107.54	6.5	1.59	1.29	21.39
7	102.70	6.5	1.67	1.36	21.41
8	97.77	6.5	1.86	1.50	22.61
9	97.82	6.5	1.7	1.38	20.75
10	97.83	6.5	1.67	1.36	20.40
11	97.6	6.5	1.78	1.44	21.63
12	106.64	6.5	1.61	1.31	21.47
13	99.26	6.5	1.54	1.25	19.15
14	97.29	6.5	1.59	1.29	19.35
15	101.54	6.5	1.51	1.23	19.23
16	104.23	6.5	1.61	1.31	20.98
17	97.5	6.5	1.73	1.40	21.03
18	100.83	6.5	1.68	1.36	21.14
19	101.67	6.5	1.67	1.36	21.20
20	101.32	6.5	1.68	1.36	21.24
				AVERAGE	20.99

CARTRIDGE B

Sample	Brew Volume (g)	Coffee Weight (g)	Brix	% SS (*)	% Yield
1	100.65	6.5	1.87	1.511	23.39

2	95.85	6.5	1.86	1.503	22.16
3	98.4	6.5	1.8	1.456	22.04
4	92.43	6.5	2.3	1.845	26.23
5	100.26	6.5	1.72	1.394	21.50
6	98.05	6.5	2.05	1.651	24.90
7	99.49	6.5	1.96	1.581	24.19
8	95.62	6.5	2.3	1.845	27.14
9	94.28	6.5	2.17	1.744	25.29
10	96.13	6.5	1.72	1.394	20.62
11	96.86	6.5	1.81	1.464	21.82
12	94.03	6.5	2.2	1.767	25.56
13	96.28	6.5	1.78	1.441	21.34
14	95.85	6.5	1.95	1.573	23.19
15	95.36	6.5	1.88	1.518	22.28
16	92.73	6.5	1.89	1.526	21.77
17	88	6.5	1.59	1.293	17.50
18	93.5	6.5	2.08	1.674	24.08
19	100.88	6.5	1.75	1.417	22.00
20	84.77	6.5	2.37	1.899	24.77
				AVERAGE	23.09

Performing a t-test statistical analysis on the above data gives the following results:

5

Table 2

t-Test: Two-Sample Assuming Equal Variances

	% Yield (Cartridge A)	% Yield (Cartridge B)
Mean	20.99	23.09
Variance	0.77	5.04
Observations	20	20
Pooled Variance	2.90	
Hypothesized Mean Difference	0	
df	38	
t Stat	-3.90	
P(T<=t) one-tail	0.000188	
t Critical one-tail	1.686	
P(T<=t) two-tail	0.000376	
t Critical two-tail	2.0244	
Standard Deviation	0.876	2.245




The analysis shows that the consistency of % yield, which equates to brew strength, for the cartridges of the present invention is significantly better (at a 95%
5 confidence level) than the prior art cartridges, with a standard deviation of 0.88% compared to 2.24%. This means that beverages brewed with the cartridges of the present invention have a more repeatable and uniform strength. This is preferred by consumers who like their drinks to taste the
10 same time after time and do not want arbitrary changes in brew strength.




The materials of the cartridges described above may be provided with a barrier coating to improve their resistance to oxygen and/or moisture and/or other contaminant ingress.
15 The barrier coating may also improve the resistance to leakage of the beverage ingredients from within the cartridges and/or reduce the degree of leaching of extractibles from the cartridge materials which might adversely affect the beverage ingredients. The barrier
20 coating may be of a material selected from the group of PET, Polyamide, EVOH, PVDC or a metallised material. The barrier coating may be applied by a number of mechanisms including but not limited to vapour deposition, vacuum deposition, plasma coating, co-extrusion, in-mould labelling and
25 two/multi-stage moulding.

Claims:

1. A cartridge containing one or more beverage ingredients
and being formed from substantially air- and water-
impermeable materials, said cartridge comprising a
storage chamber containing the one or more beverage
ingredients, wherein the aspect ratio of the vertical
height of the storage chamber to the diameter of the
storage chamber is between 0.1 and 0.35.
2. A cartridge as claimed in claim 1 wherein the aspect
ratio of the vertical height of the storage chamber to
the diameter of the storage chamber is 0.20 to 0.25.
3. A cartridge as claimed in claim 1 or claim 2 wherein
the cartridge is disc-shaped.
4. A method of dispensing a beverage from a cartridge
containing one or more beverage ingredients in a
storage chamber, comprising the steps of passing an
aqueous medium through the cartridge to form a beverage
from said one or more beverage ingredients, and
dispensing the beverage into a receptacle, wherein the
cartridge has an aspect ratio of the vertical height of
the storage chamber to the diameter of the storage
chamber of between 0.1 and 0.35 and the aqueous medium
is passed through the cartridge at a pressure of 0.1 to
2.0 bar.

5. A method as claimed in claim 4 wherein the aspect ratio of the vertical height of the storage chamber to the radius of the storage chamber is 0.20 to 0.25.

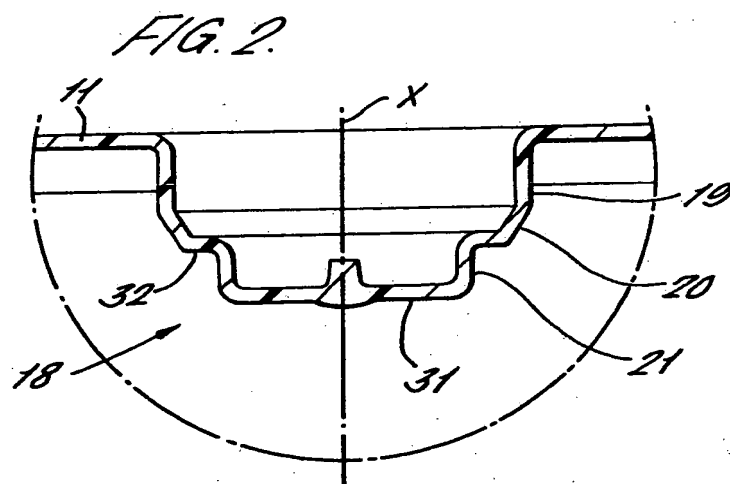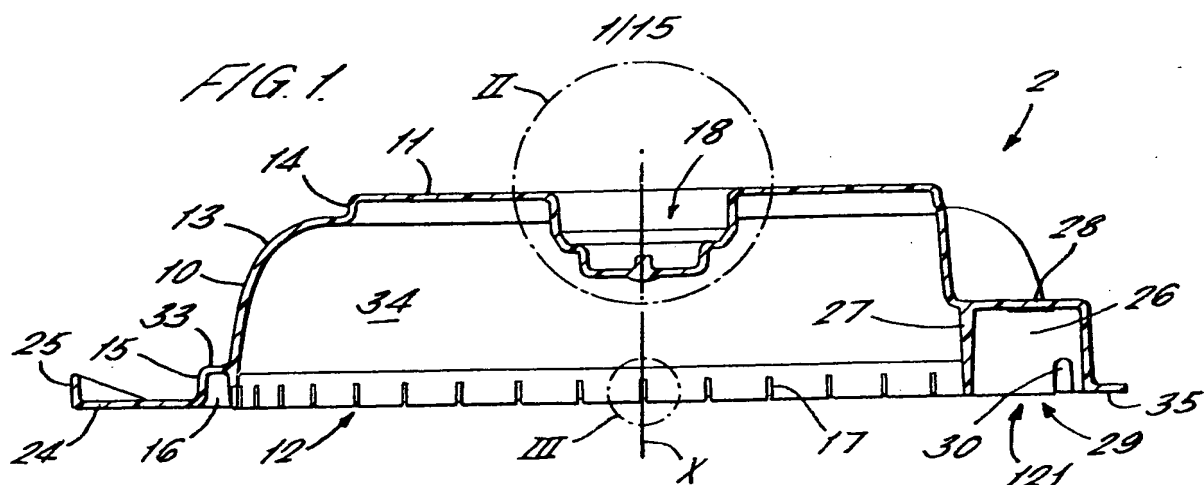

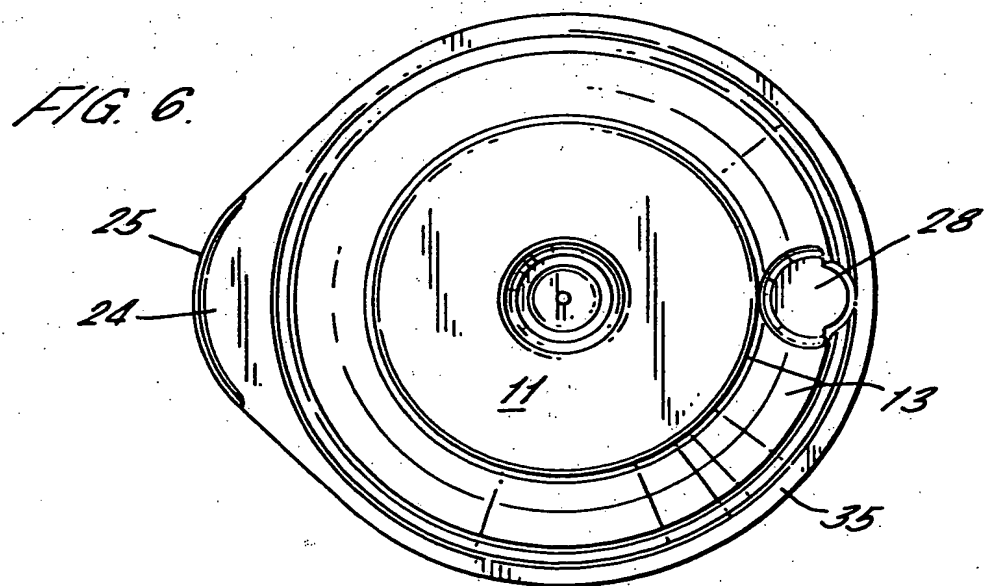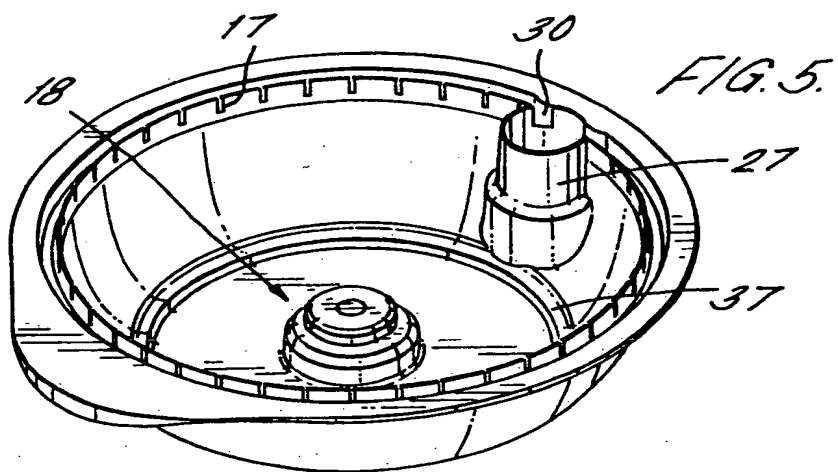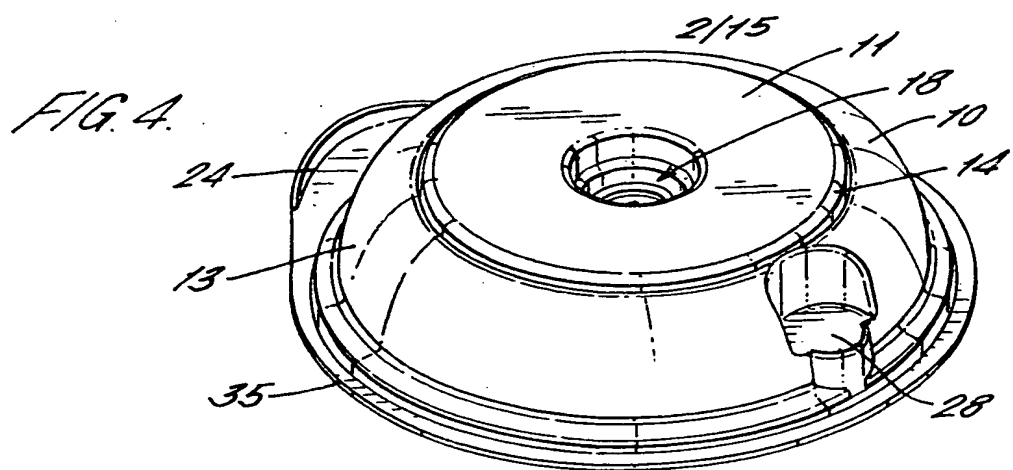









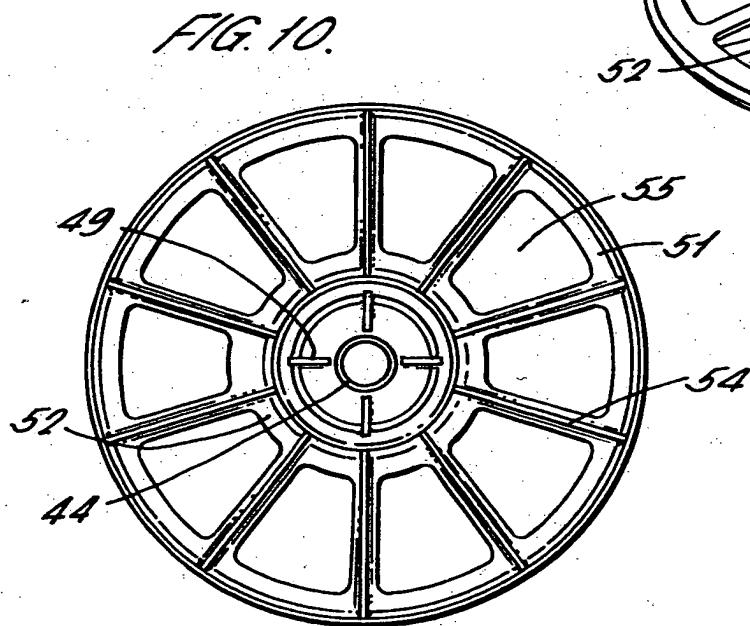


FIG. 11

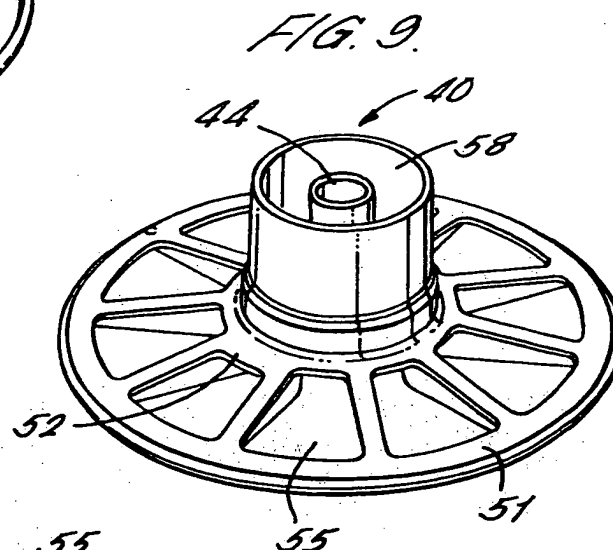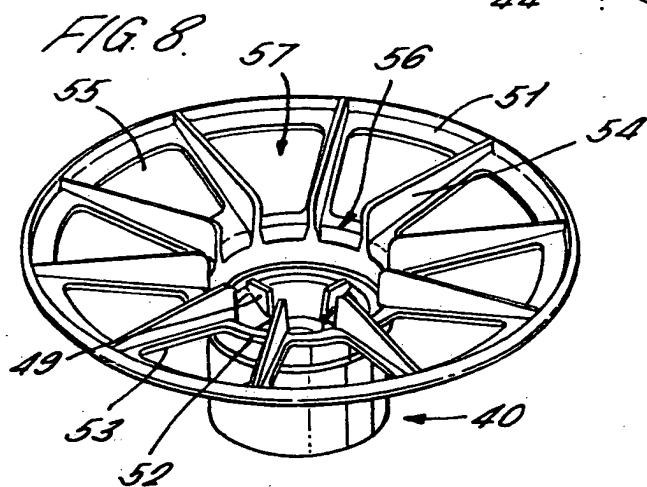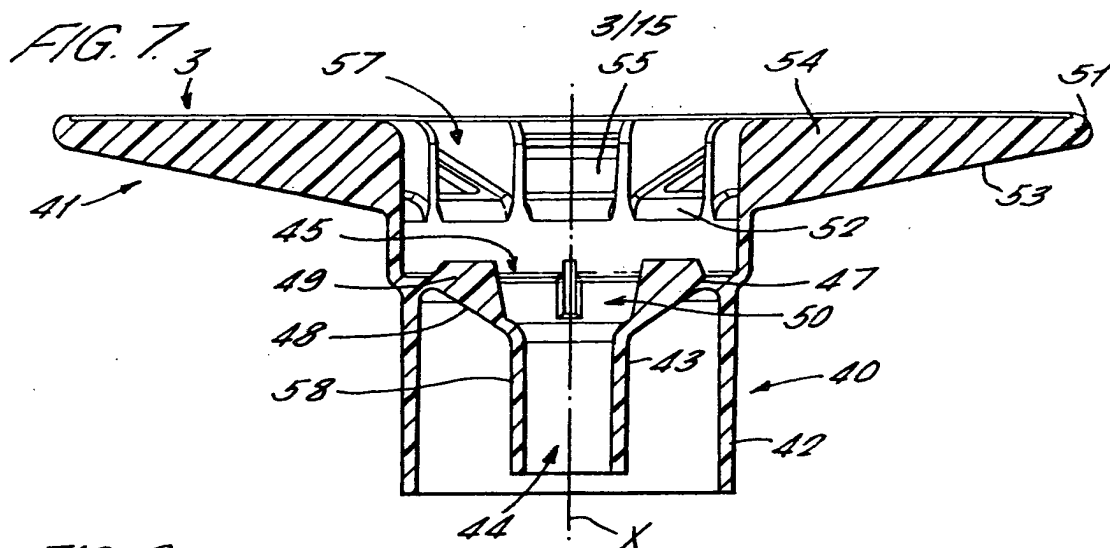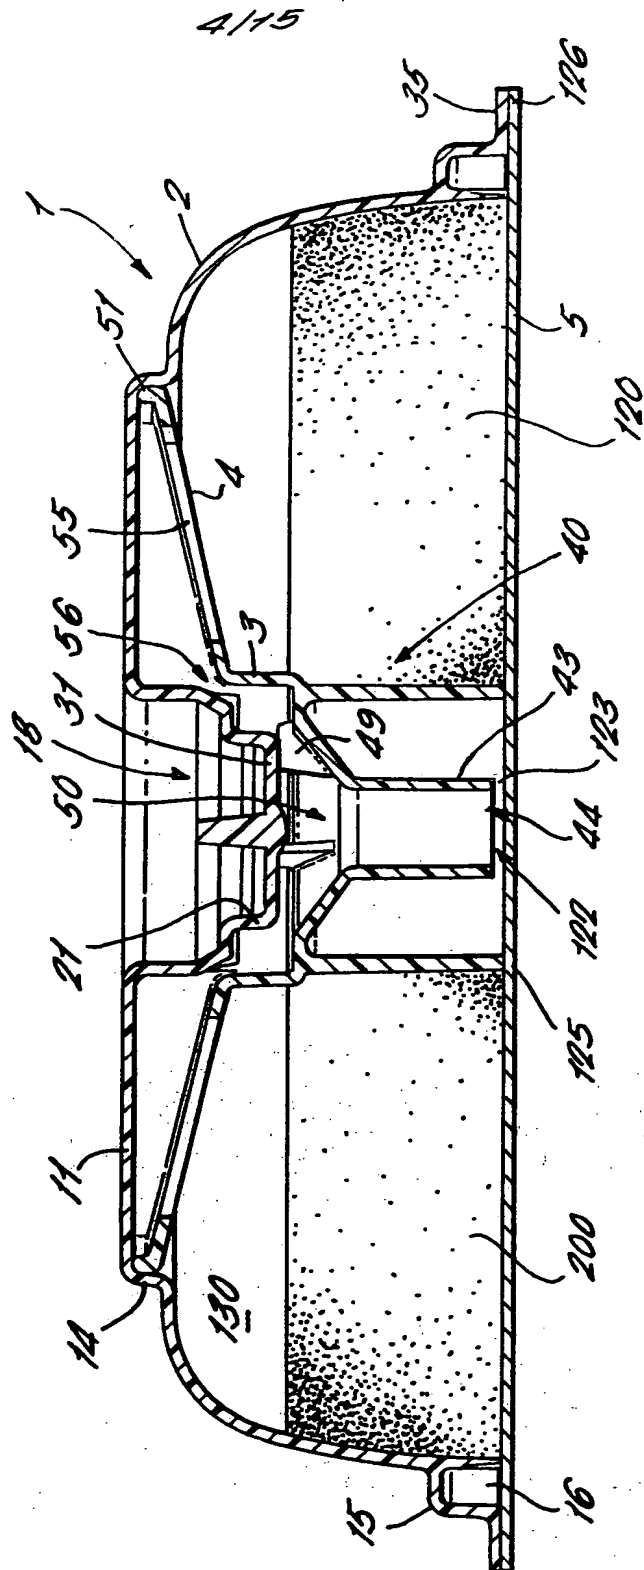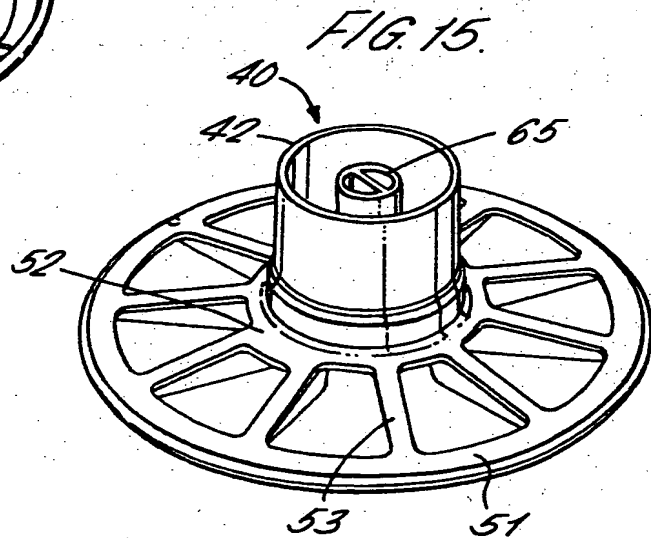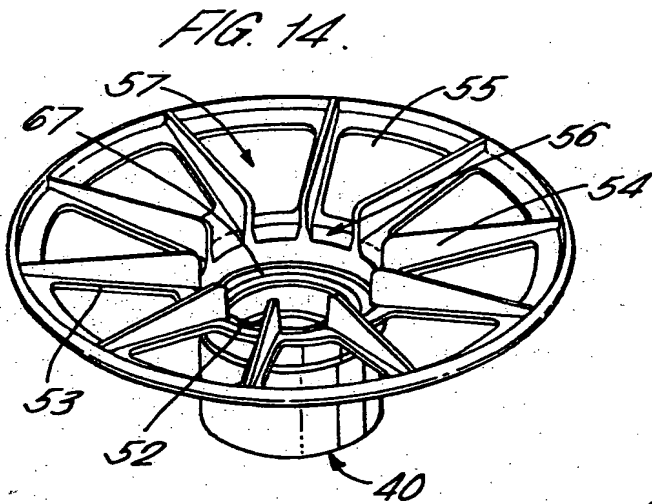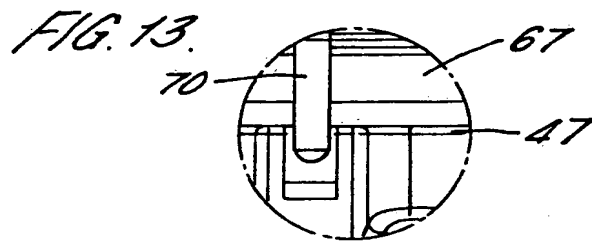

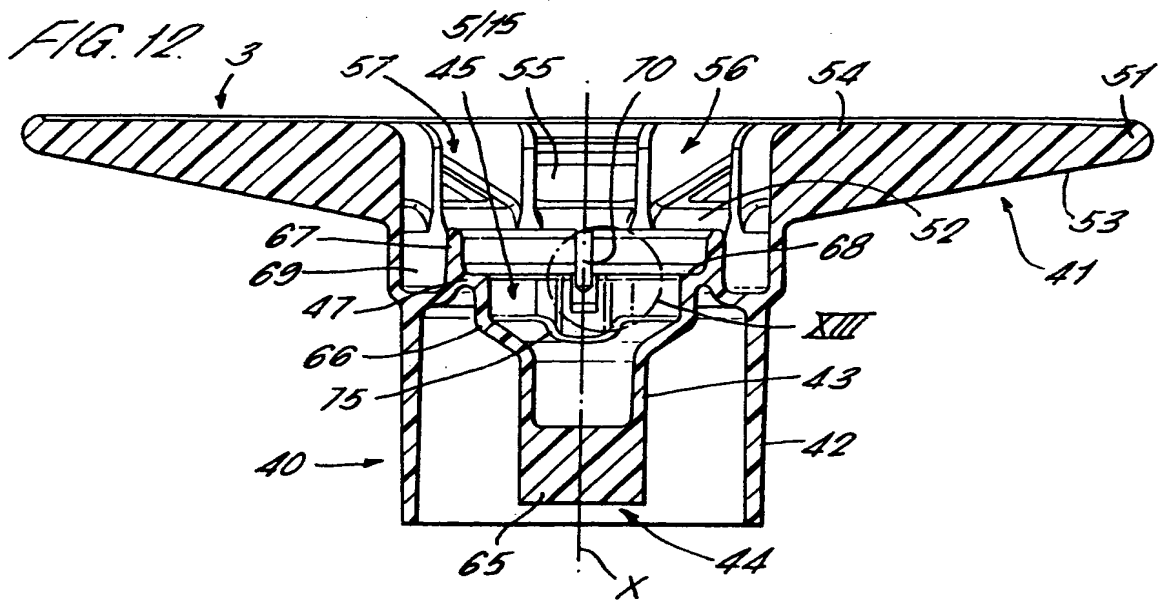

6/15

FIG. 16.



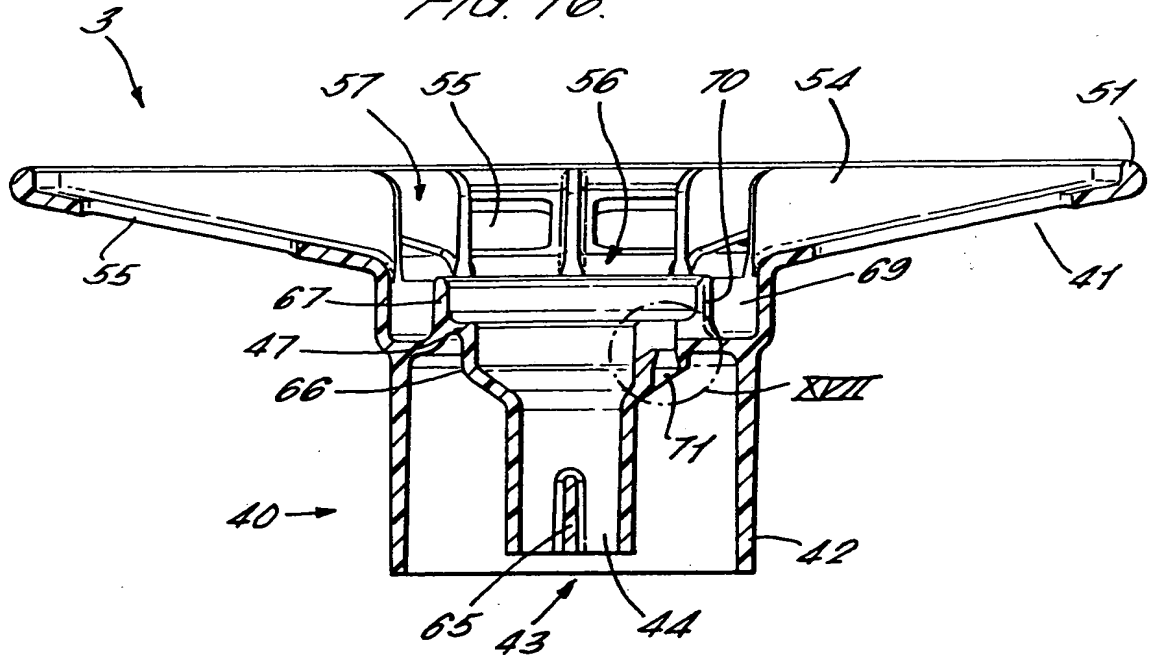


FIG. 17.

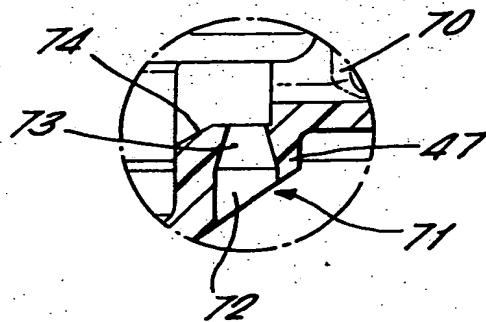

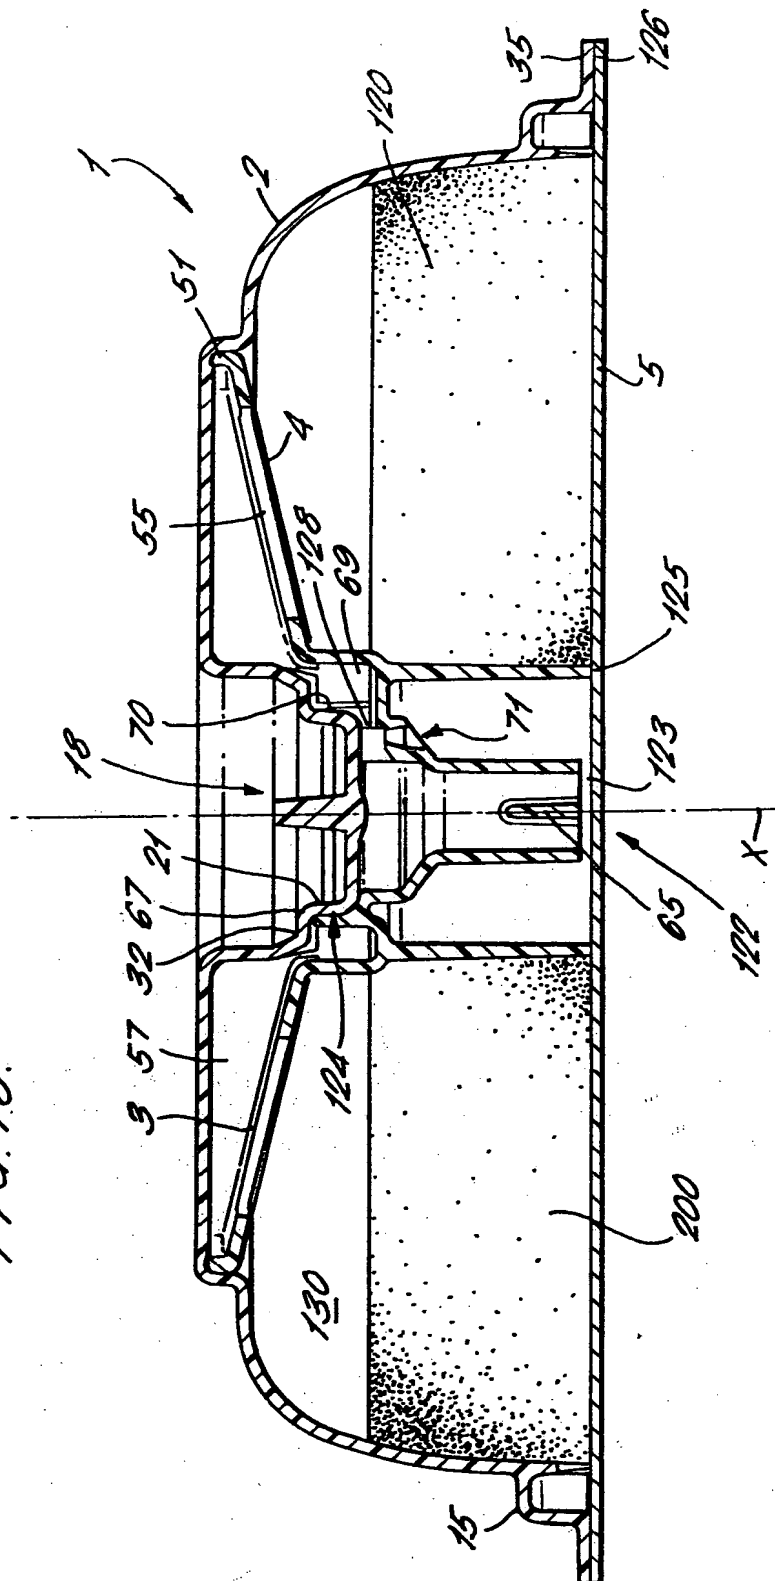

F/G 18.

8/15


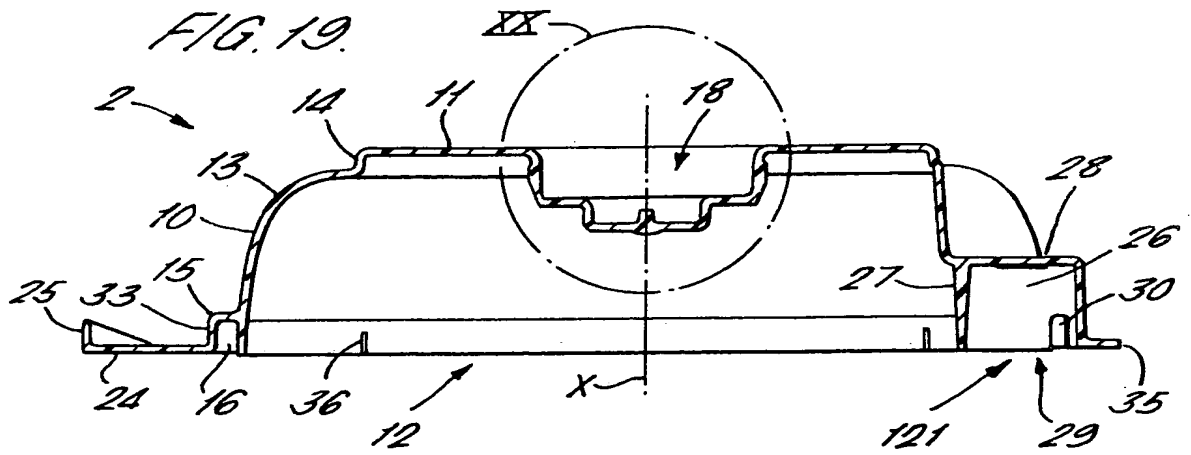


FIG. 20.

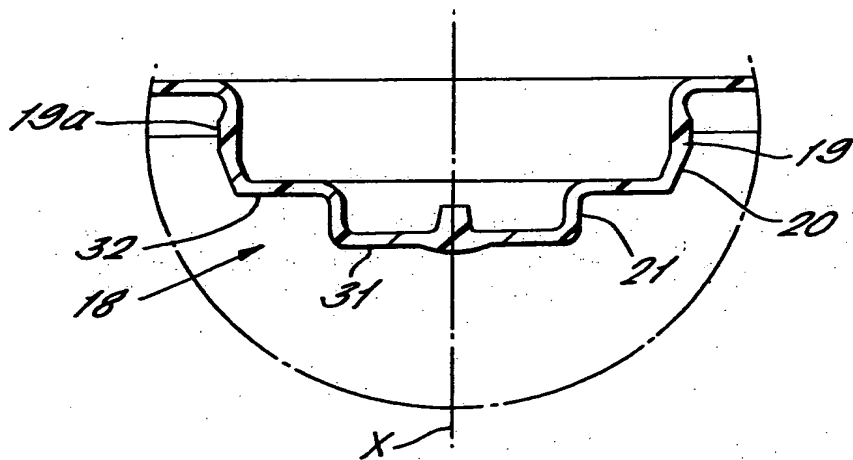

9/15

FIG. 21.

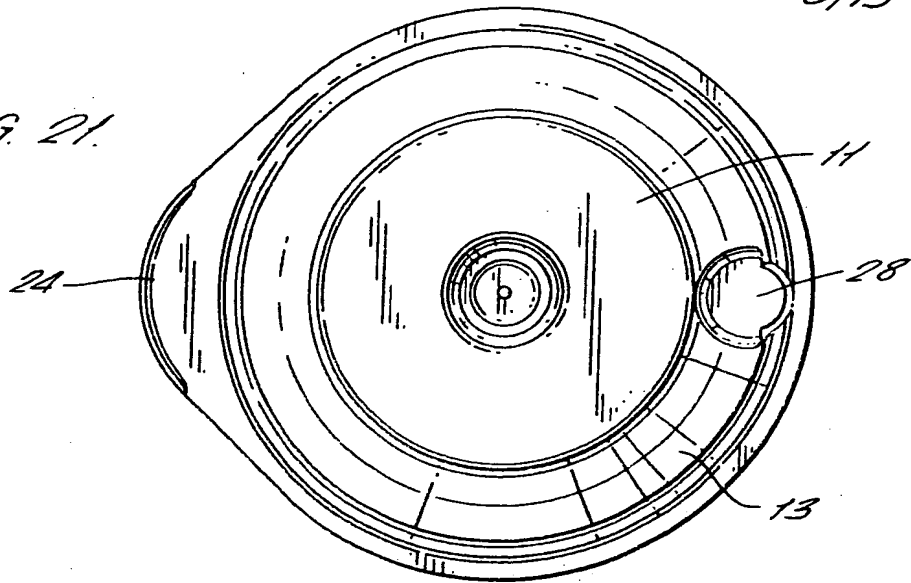


FIG. 22.

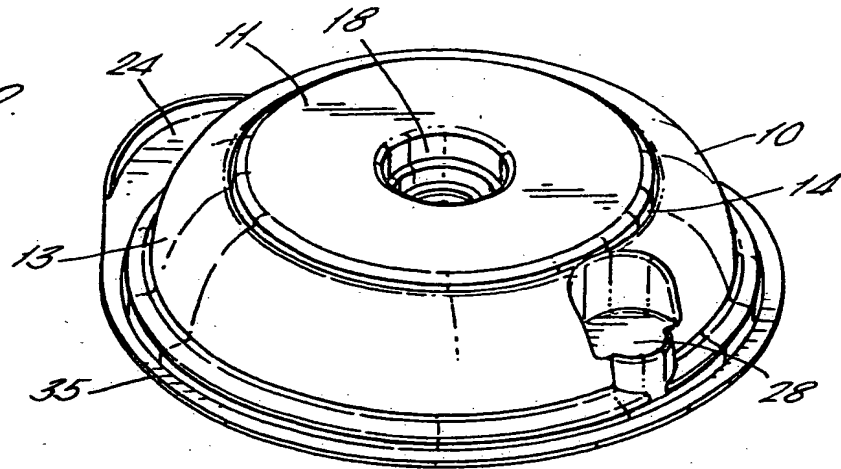
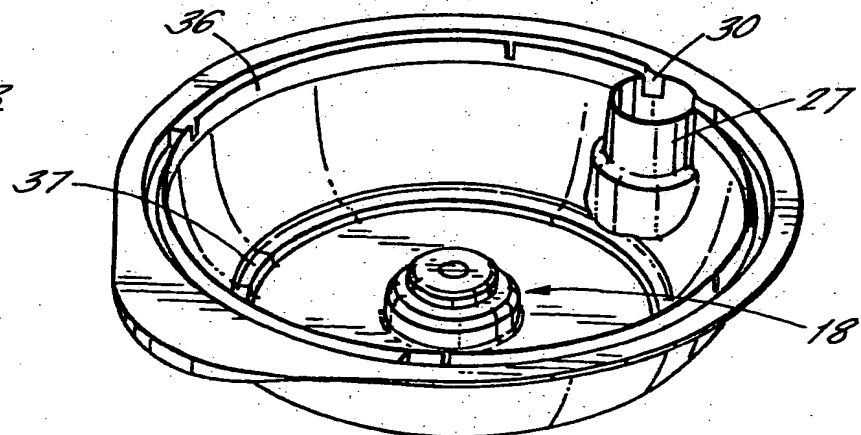


FIG. 23.



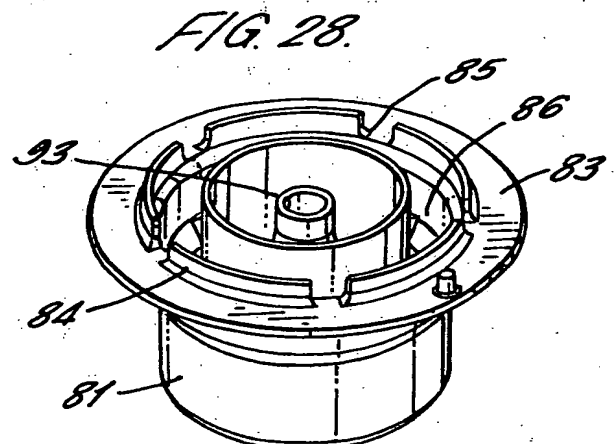
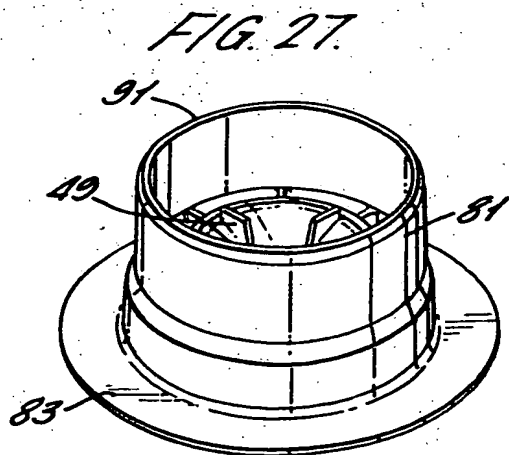

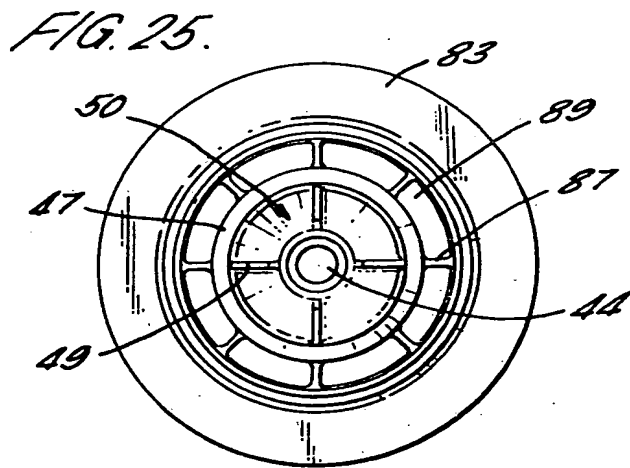
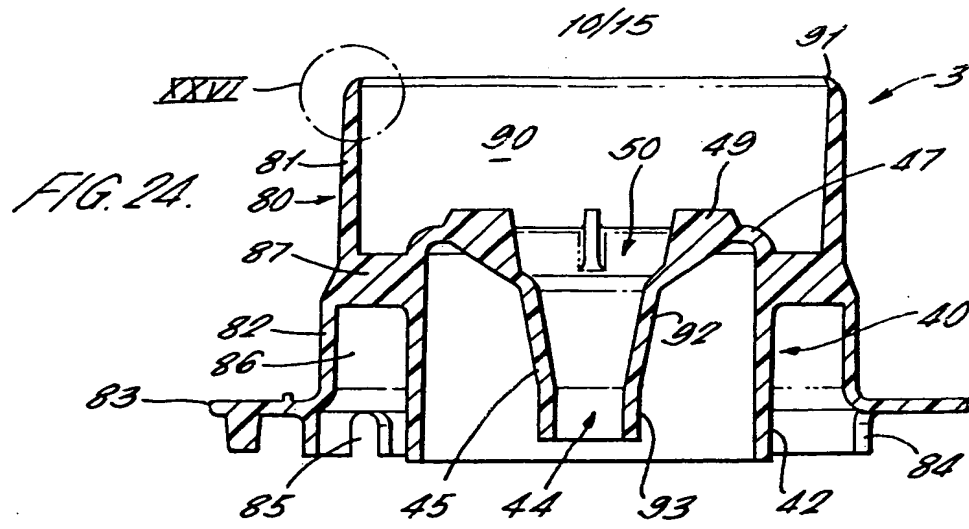
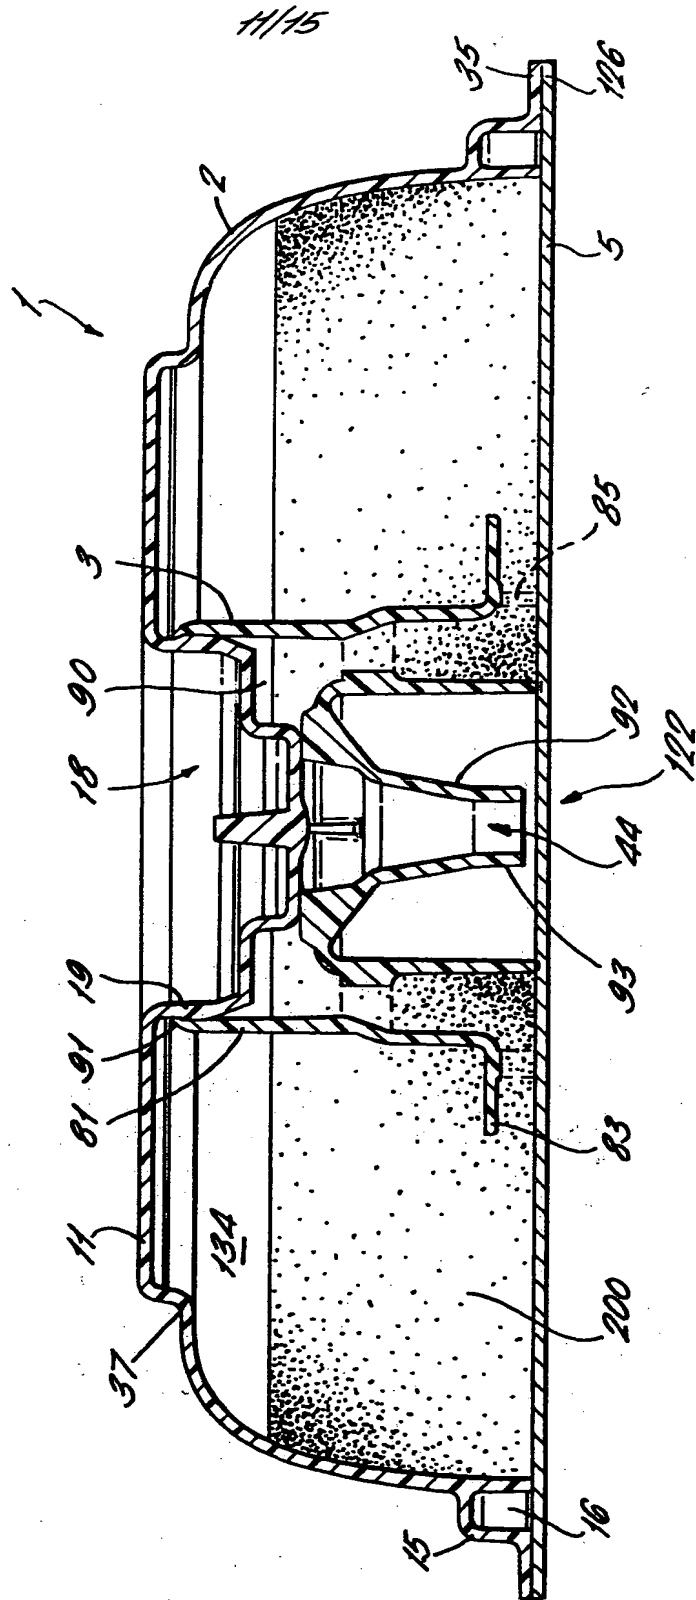


FIG. 29







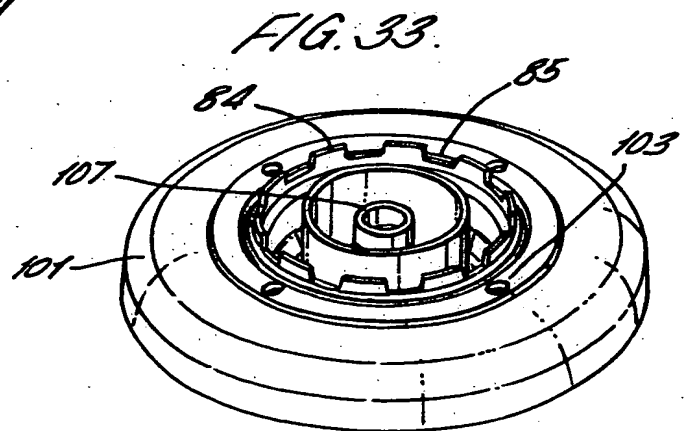


FIG. 34.

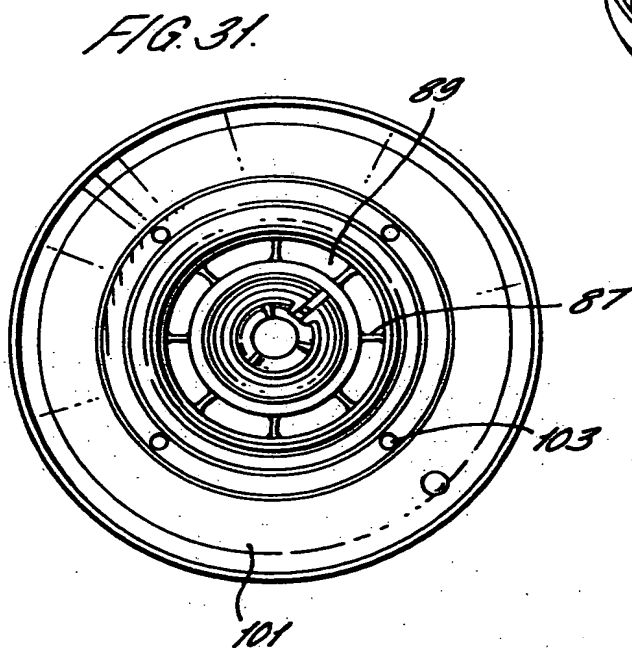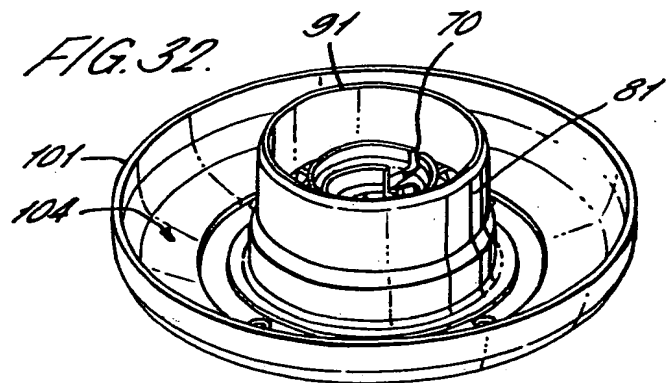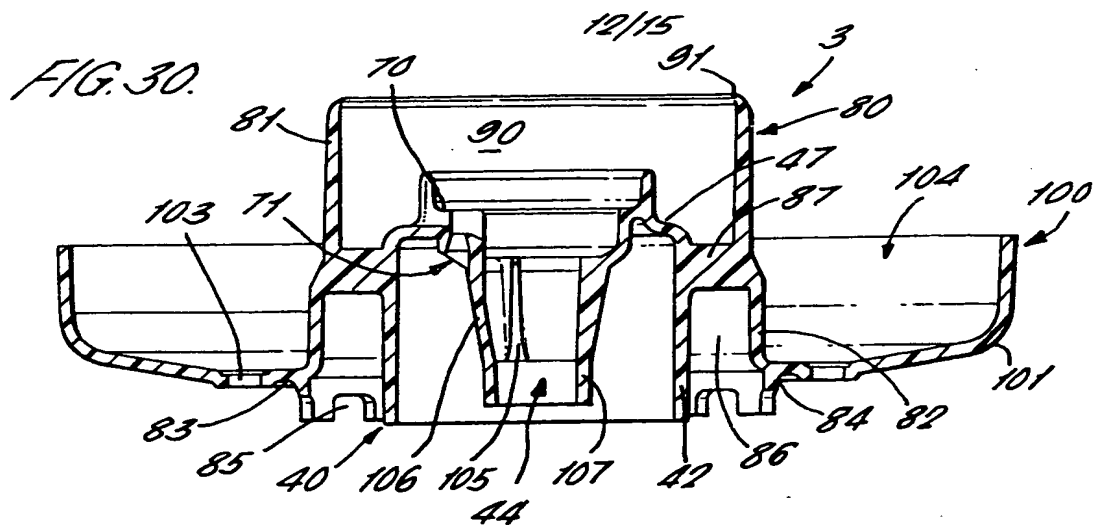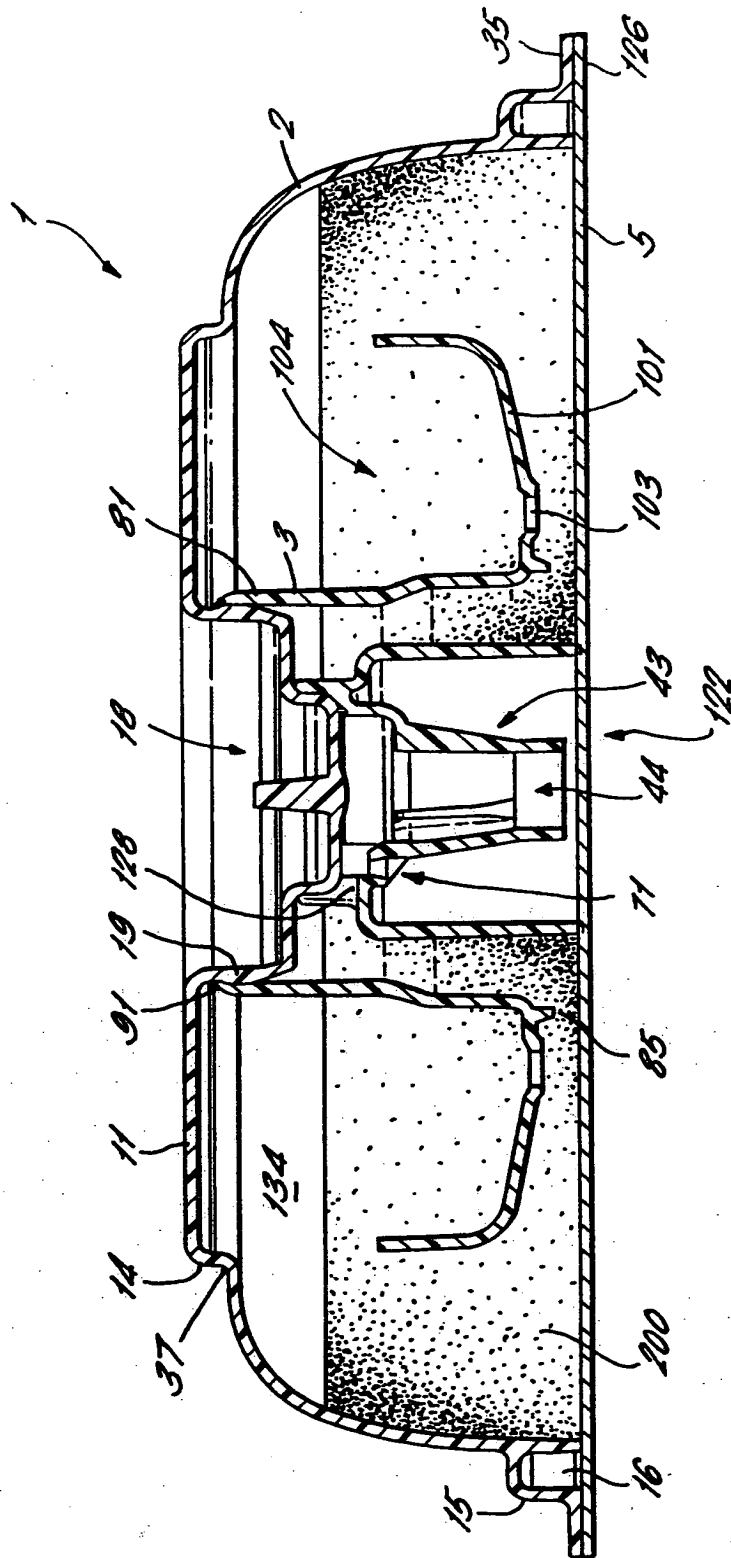

14/15

FIG. 35a.

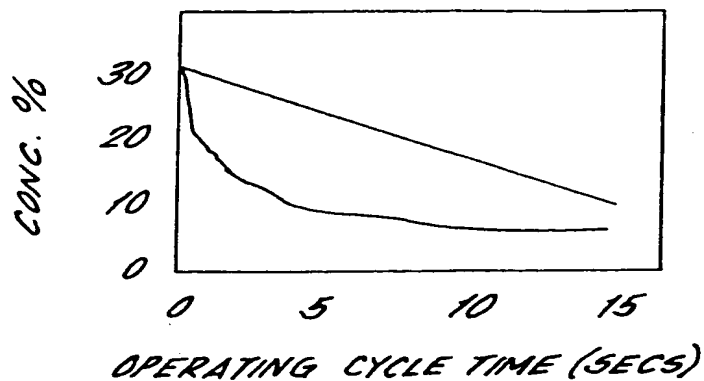


FIG. 35b.

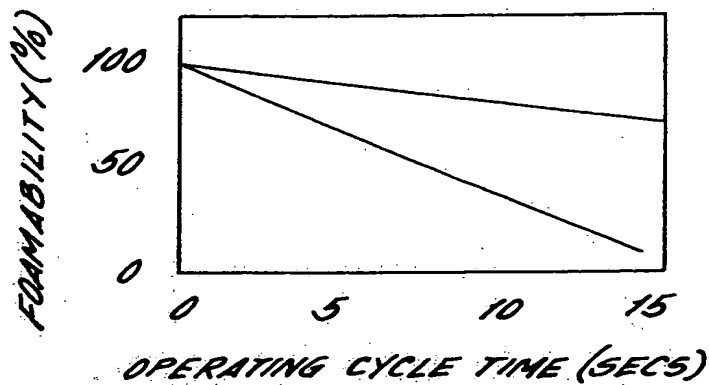


FIG. 35c.

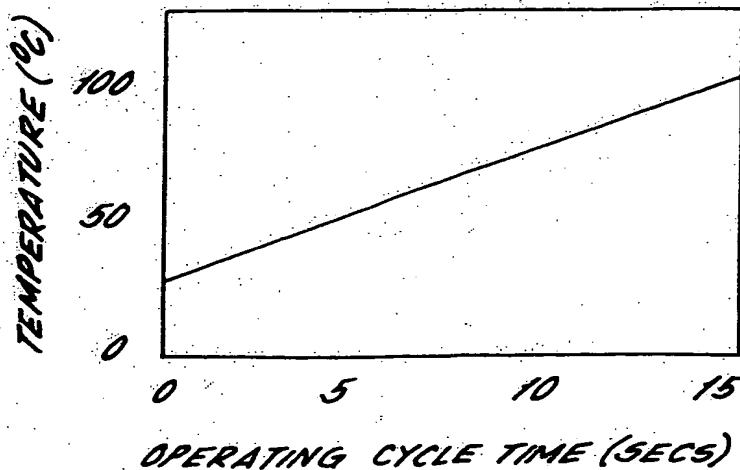


FIG. 36.

